



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

11046 U.S. PRO  
10/056369



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

01200298.6

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

04/10/01





**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.: 01200298.6  
Demande n°:

Anmeldetag:  
Date of filing: 25/01/01  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven  
NETHERLANDS

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
Cathode ray tube with convergence unit

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:  
/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:



Cathode Ray Tube with convergence unit

25. 01. 2001

(55)

The invention comprises a cathode ray tube comprising an electron gun for generating three electron beams, deflecting means for deflecting the electron beams at a deflection plane, and convergence means for dynamically influencing a convergence of the electron beams, said convergence means comprising coils for generating a magnetic field.

5 The invention further comprises convergence means.

WO-00/79560 discloses a color display device comprising an in-line electron gun for generating three electron beams, deflecting means for deflecting the electron beams in a deflection plane, and convergence means for dynamically influencing a convergence of  
10 the electron beams. The convergence means comprise a ring-shaped element having four coils, i.e. a quadrupole coil, for generating a magnetic quadrupole field. This magnetic quadrupole field reduces a distance between the electron beams at a location of the deflection plane, hence deflecting the outer two electron beams towards each other. A second magnetic quadrupole coil generated by a second quadrupole coil, serves to subsequently deflect the  
15 outer beams in the opposite direction. The quadrupole coils are positioned at some distance from each other. The first quadrupole coil is positioned near the electron gun and is called the gun quadrupole coil, whereas the second quadrupole coil is positioned near the deflection means.

20 The distance between the electron beams is dynamically influenced. By virtue thereof, the distance between the electron beams in the plane of deflection can be changed dynamically in such a manner that this distance decreases as the deflection increases. By dynamically changing this distance, as a function of the deflection, the distance between a display screen and a color selection electrode can increase accordingly in the relevant  
25 direction. The shape of an inner surface of the display screen and the distance between the display window and the color selection electrode determine the shape, in particular the curvature, of the color selection electrode. Thus, the curvature of the color selection electrode can be increased, which has a positive effect on the mechanical properties of the color selection electrode such as doming and microphonics. This method enables to provide a

display screen having a real flat screen surface on the outside, while the inner surface of the display screen can be provided with a certain curvature. Such a screen has good mechanical and optical properties.

5                   It appears that during operation of such a display device vertical pairs of light/dark lines do occur on the screen after dark/light transitions in the image. Such lines do disturb the image displayed on the screen and are unwanted.

                  It is an aim of the invention to reduce the image disturbance caused by the  
10 light/dark pairs. To this aim, the invention is characterized in that the coils are provided with an electrically conducting layer. The dependent claims describe advantageous embodiments.

                  The invention is based on the insight that the disturbing pairs of lines are caused by ringing. Ringing occurs if a first coil is influenced by the magnetic field of a second coil, which is positioned nearby the first coil. This unwanted interference  
15 phenomenon is during operation of the display device visible on the display screen as pairs of light/dark lines. It appeared that the first quadrupole coil is influenced by a so-called Scan Velocity Modulation (SVM) coil, which is located in the neighborhood of the first quadrupole coil. The SVM coil serves to modulate the scan velocity of the electron beams by virtue of which image artifacts are suppressed. The SVM coil can be embodied as a foil coil  
20 or as windings of copper on a plastic carrier, which is placed in a hollow cylindrical coil holder of the first quadrupole coil. High frequent (0.5 – 5 MHz) signals from the SVM coil can capacitively or inductively influence the first quadrupole coil, with the above mentioned pairs of light/dark lines as a result in which the ringing modulation is clearly visible.

25                   From WO-99/66526 it is known as such that in case of a pair of line- and frame deflection coils of a cathode ray tube ringing may occur between the deflection coils, which is visible as a gradually decaying curtain of alternating lighter and darker vertical bars at one of the edges of the display screen. In this case ringing can be suppressed by winding the deflection coils from electrically conductive wire of which an outer layer, the so-called  
30 adhesive layer, has been provided with conductive particles. During the formation of the line deflection coils, the adhesive layers are melted together and a conductive layer is formed in and on the line deflection coils. Alternatively, the conductive particles can be applied by impregnating the coils with a solution of conductive material and, subsequently, allowing the solution to dry. The anti-ringing solution in which use is made of electrically conducting wire

with particles in the adhesive layer cannot be applied since the material of the coil holder does not withstand the required high temperatures of the melting process. The solution in which the coil is impregnated has as drawback that it requires additional impregnating, cleaning and drying steps.

5 In an embodiment of the quadrupole coil according to the invention electrically conductive wire is applied having an outer layer comprising conductive particles on top of the standard isolating layer. Hence the electrically conductive wire does not have an adhesive layer. The conductive particles may advantageously comprise particles of carbon.

10 These and other objects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1 is a sectional view of a display device, in which the invention is schematically shown; and

15 Fig. 2 shows an embodiment of the converging means according to the invention.

The figures are not drawn to scale. In the figures, like reference numerals generally refer to like parts.

20 The display device shown in Fig. 1 comprises a cathode ray tube, in this example a color display tube, having an evacuated envelope 1 which includes a display window 2, a cone portion 3 and a neck 4. In the neck 4 there is arranged an in-line electron gun 5 for generating three electron beams 6, 7 and 8 which extend in one plane, the in-line plane, which is in this case the plane of the drawing. In the undeflected state, the central  
25 electron beam 7 substantially coincides with the tube axis 9.

The inner surface of the display window is provided with a display screen 10. The display screen 10 comprises a large number of phosphor elements luminescing in red, green and blue. On their way to the display screen, the electron beams are deflected across the display screen by way of an electromagnetic deflection unit 51 and pass through a color  
30 selection electrode 11 which is arranged in front of the display window 2 and which comprises a thin plate having apertures 12. The three electron beams 6, 7 and 8 pass through the apertures 12 of the color selection electrode at a small angle relative to each other and hence each electron beam impinges only on phosphor elements of one color. The deflection unit 51 comprises, in addition to a coil holder 13, deflection coils 13' for deflecting the

electron beams in two mutually perpendicular directions. The display device further includes means for generating voltages, which during operation are fed to components of the electron gun via feedthroughs. The deflection plane 20 is schematically indicated as well as the distance  $p$  between the electron beams 6 and 8 in this plane.

5           The color display device comprises two convergence units 14, 14', whereby a first unit 14 is used, in operation, to dynamically bend, i.e. as a function of the deflection in a direction, the outermost electron beams towards each other, and a second unit 14' serves to dynamically bend the outermost electron beams in opposite directions.

10           The two convergence units 14, 14' are positioned at some distance from each other, and are used to vary the distance  $p$ , as a function of the deflection, in a such a manner that the distance  $p$  decreases as a function of the deflection in at least one direction. The first unit 14 is positioned close to the gun and will be referred to as the "gun quadrupole", whereas the second unit 14' is located near the deflection unit.

15           Fig. 2 shows an embodiment of the gun quadrupole 14, which comprises a cylindrically shaped element 21 having an outer surface 26 that is provided with protrusions 28 around which four coils 22 are wound in respective stacks of wire. Pins 27 and 29 are a starting position, respectively an end position of the coil winding process and are also used as connection pins to the outside electronics. The thus obtained gun quadrupole 14 comprises  
20 four identical coils 22, where each coil 22 is located in a quadrant of the circle and symmetrically arranged with respect to a line that has an angle of  $45^\circ$  with the X-direction. This embodiment has the advantage that a quadrupole element is created that -during operation- is almost free of dipole, 6-pole or 8-pole magnetic field components.

25           Further, the angle  $\alpha$  has been chosen such that each coil 22 extends over an angle  $\alpha$  having a value of  $60^\circ \pm 5^\circ$ . Here the angle  $\alpha$  is measured from the middle of the stack of wires. This measure ensures the absence of 12-pole field components.

30           The cylindrical shape of the element 21 facilitates an easy positioning of the quadrupole in the neighborhood of the electron gun. A further advantage is that the cylinder may be used to contain additional coil elements such as, for example a so-called Scan Velocity Modulator (SVM) coil. The SVM coil serves to modulate the scan velocity of the electron beams by virtue of which image artifacts are suppressed. This additional coil may be contained in the cylinder in the form of a wound-up foil.



In summary, the invention relates to a color display device comprising an in-line electron gun 5 for generating three electron beams 6,7,8, and convergence means 14 to dynamically influence the convergence of the electron beams. The convergence means 14 comprise coils 22 for generating a magnetic field. The coils 22 are provided with an  
5 electrically conducting layer for the suppression of ringing.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any  
10 reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of other elements or steps than those listed in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements.



## CLAIMS:

EPO - DG 1  
25. 01. 2001

(55)

1. A cathode ray tube comprising  
an electron gun (5) for generating three electron beams (6,7,8),  
deflecting means (51) for deflecting the electron beams (6,7,8) at a deflection  
plane (20), and

5 convergence means (14) for dynamically influencing a convergence of the  
electron beams (6,7,8), said convergence means (14) comprising coils (22) for generating a  
magnetic field

characterized in that,

the coils (22) are provided with an electrically conducting layer.

10

2. Convergence means (14) for dynamically influencing a convergence of  
electron beams (6,7,8), said convergence means comprising coils (22) for generating a  
magnetic field, characterized in that the coils are provided with an electrically conducting  
layer.



ABSTRACT:

7

EPO - DG 1

22.01.2001

25. 01. 2001

(55)

The invention relates to a color display device comprising an electron gun (5) for generating three electron beams (6,7,8), and convergence means (14) to dynamically influence the convergence of the electron beams. The convergence means (14) comprise coils (22) for generating a magnetic field. The coils (22) are provided with an electrically  
5 conducting layer.

Fig. 2



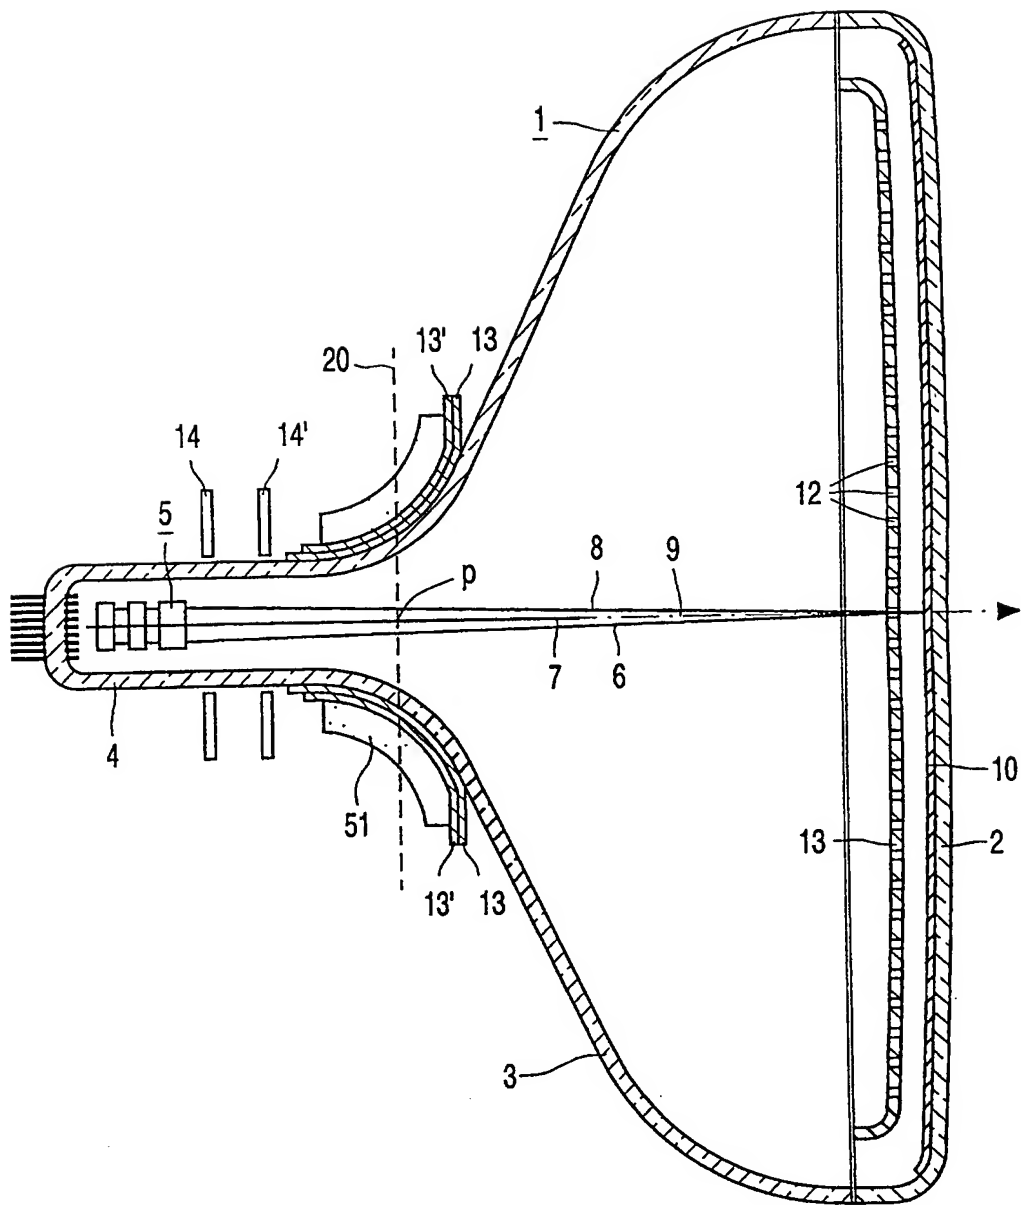


FIG. 1

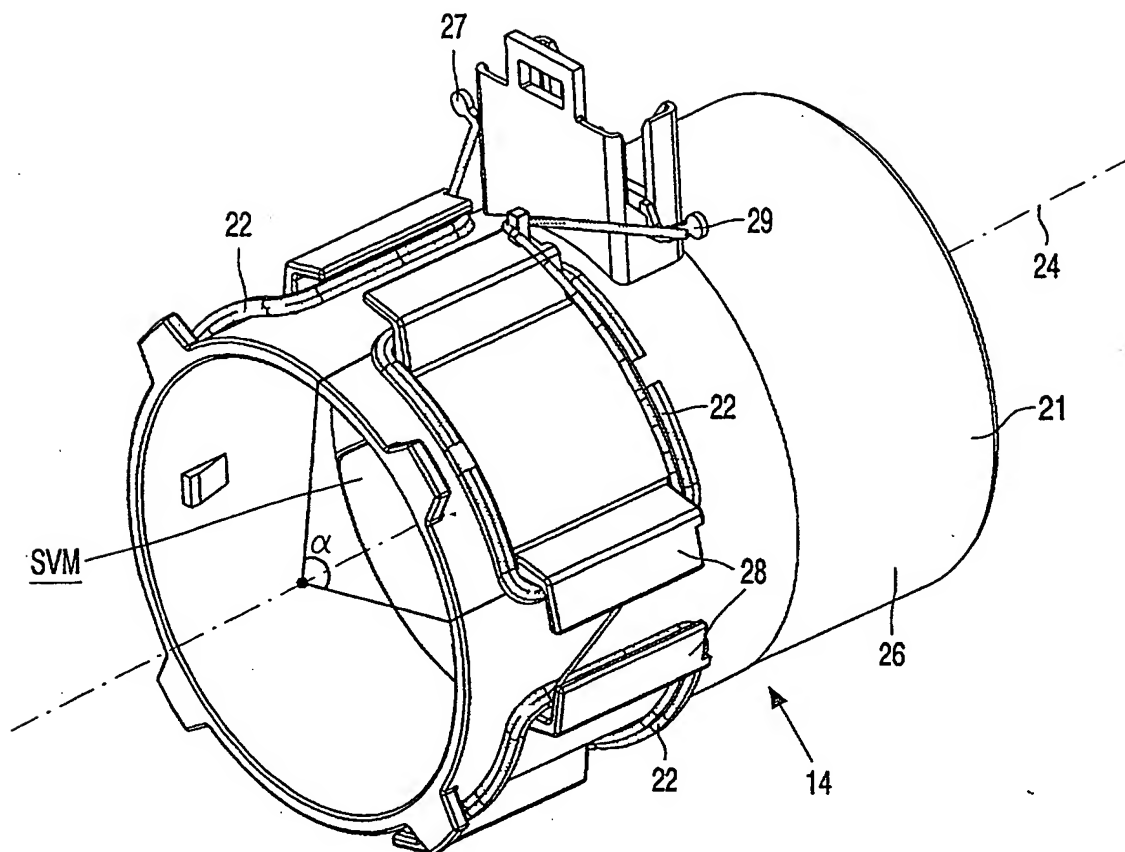


FIG. 2